


# COR-HDA150UTP

## VIDEO TRANSMITTER OVER UN-SHIELDED TWISTED PAIR

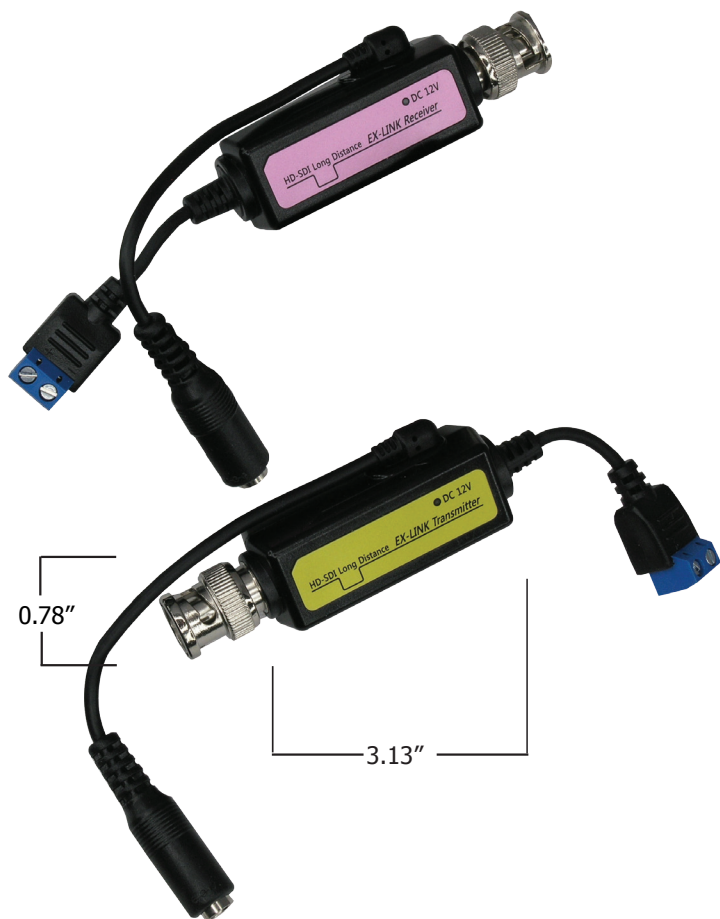

### KEY BENEFITS

- SENDS HD SDI SIGNAL OVER CAT5E/6 UTP CABLE
- SUPPORT SDI (SMPTE 259M), HD-SDI (SMPTE 292M)
- EXTERNAL POWER REQUIRED (SOLD SEPARATELY)
- UP TO 500FT OVER 1 PAIR
- COMPACT SIZE
- UTP 2 WIRE CONNECTION

### DESCRIPTION

This HD-SDI UTP transmitter is a long distance transmission device over 2 wire conductor (we recommend CAT5E/CAT6 twisted pair).

The HDA150UTP device transmits the HD-SDI signal up to 500ft over 1 pair UTP cable without using a repeater. Comes in a compact size and provides a terminal block for easy installations.

### SPECIFICATIONS

		Transmitter	Receiver
Signal Input		HD-SDI (Full HD: 1.5G)	EX-SDI
Signal Output		EX-SDI	HD-SDI (Full HD: 1.5G)
Power Input		DC12V/0.5A	DC12V/0.5A
Power Consumption		DC12V/1.3W	DC12V/1.3W
Max. Transmission distance (Tx. to Rx.)		CAT.5e / 150m Full HD: 1.5G)	
Connection Port	Signal Input	BNC_M 75 Ω	BNC_M 75 Ω
	Signal Output	Terminal Block 2P	Terminal Block 2P
	Power Input	2.1mm DC plug	2.1mm DC plug
LED	RED	ON: Power Input	
	GREEN	ON: Signal Input	
Operating Temperature		-10° C - +50° C /	
Humidity		0 - 80%	
Case		ABS	ABS
Weight		45g	45g
Dimensions		80(W) x 20 (H) X 20 (D) mm	80(W) x 20 (H) X 20 (D) mm
		3.13(W) x .78 (H) x .78 (H) inches	3.13(W) x .78 (H) x .78 (H) inches

### INSTALLATION VIEW



COR-HDA150UTP